(54) Title: POLYMERISATION PROCESS

MWD by GPC vs T polymerisition
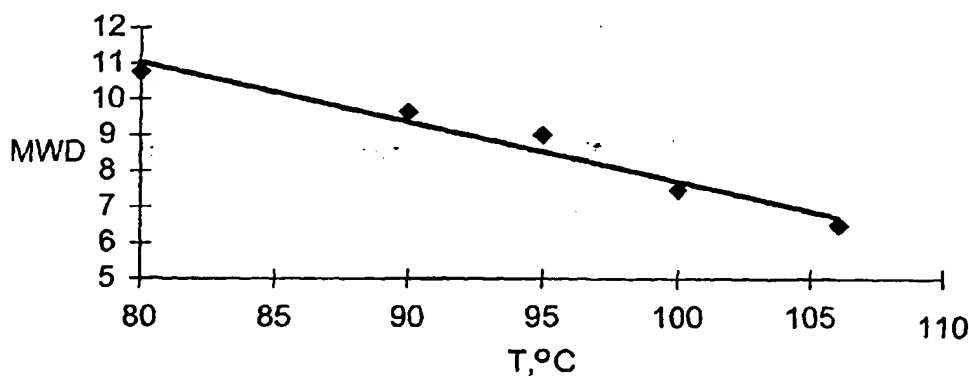
(57) Abstract: A polymerisation process for 1-olefins is disclosed, using as catalyst a late transition metal complex, wherein temperature is used to control the molecular weight distribution M_w/M_n, die-swell, plastic recovery or MFR ratio of the polymer produced.

WO 01/77193 A1

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*
— *of inventorship (Rule 4.17(iv)) for US only*

Published:
— *with international search report*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

POLYMERISATION PROCESS

The present invention relates to a process for the polymerisation and copolymerisation of 1-olefins, and specifically to such processes utilising polymerisation catalysts based on certain transition metal complexes.

The use of certain transition metal compounds to polymerise 1-olefins, for

5   example, ethylene or propylene, is well established in the prior art. The use of Ziegler-Natta catalysts, for example, those catalysts produced by activating titanium halides with organometallic compounds such as triethylaluminium, is fundamental to many commercial processes for manufacturing polyolefins. Over the last twenty or thirty years, advances in the technology have led to the development of Ziegler-Natta

10   catalysts which have such high activities that olefin polymers and copolymers containing very low concentrations of residual catalyst can be produced directly in commercial polymerisation processes. The quantities of residual catalyst remaining in the produced polymer are so small as to render unnecessary their separation and removal for most commercial applications. Such processes can be operated by

15   polymerising the monomers in the gas phase, or in solution or in suspension in a liquid hydrocarbon diluent. Polymerisation of the monomers can be carried out in the gas phase (the "gas phase process"), for example by fluidising under polymerisation conditions a bed comprising the target polyolefin powder and particles of the desired catalyst using a fluidising gas stream comprising the gaseous monomer.

20   Our own WO99/12981 discloses that 1-olefins may be polymerised by contacting it with certain transition metal, particularly iron, complexes of selected 2,6-pyridinecarboxaldehydebis(imines) and 2,6-diacylpyridinebis(imines). Our

1

WO99/00713 discloses products made using such catalysts, and also discusses the molecular weight distribution (MWD = M_w/M_n) of such polymers. It is an object of the present invention to provide an improved gas phase polymerisation process using such catalysts.

5   When using most traditional catalyst systems, typically only marginal variation of MWD is achievable through control of operating conditions and a compromise has to be reached in selecting a particular catalyst system that best suits all applications being targeted with that particular catalyst. Should the MWD need to be further tailored to best suit the requirements of a particular application this can therefore necessitate a

10   change of catalyst system. Not only does this require costly research and development effort to identify and optimise a range of catalysts and complexes to cover the range of applications which may be accessed by a particular catalyst family, but it also incurs significant costs associated with production of additional non-prime transitional products and the reduction in or loss of production during the such catalyst transitions.

15   EP 1026180A, published after the priority date of this application, discloses that in the case of certain specific late transition metal catalysts having Lewis base functionality, it is possible to obtain a molecular weight distribution of at least 5.0 by adjusting the temperature of the polymerisation.

We have discovered that in polymerisation processes using late transition metal

20   catalysts, there is a direct relationship between the temperature of the polymerisation and certain physical properties, notably MWD.

Accordingly, in a first aspect the present invention comprises the use of temperature to control the molecular weight distribution M_w/M_n of polymer produced by a process which comprises contacting monomeric olefin under polymerisation

25   conditions with a polymerisation catalyst comprising a late transition metal complex.

By "late transition metal complex" is meant a complex of a metal from Groups VIIIb or Ib of the Periodic Table.

Preferred late transition metal complexes have the formula

30

2

$$ \begin{array}{c} R^4 \qquad R^5 \\ \diagdown \quad \diagup \\ \parallel \quad N \\ A^1 = \qquad \qquad \diagdown \qquad L_n \\ A^2 \qquad \qquad N \longrightarrow M[T]-(T/b)X \\ A^3 \qquad \qquad \diagup \\ \diagdown \qquad N \\ \parallel \quad \diagdown \\ R^6 \qquad R^7 \end{array} $$

Formula (I)

wherein M is Fe[II], Fe[III], Co[II], Co[III], Ni[II], Rh[II], Rh[III], Ru[II], Ru[III], Ru[IV] or Pd[II]; X represents an atom or group covalently or ionically bonded to the

5   transition metal M; T is the oxidation state of the transition metal M and b is the valency of the atom or group X; L is a group datively bound to M, and n is from 0 to 5; A^1 to A^3 are each independently N or P or CR, with the proviso that at least one is CR; and R^4 to R^7 are each independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl, substituted heterohydrocarbyl or SiR'_3

10   where each R' is independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl and substituted heterohydrocarbyl.

A further aspect of the invention comprises the use of temperature to control the die-swell, plastic recovery, MFR ratio, or any other property which can be used as an indication of the processability or extrudability of the polymer being produced, of

15   polymer produced by a process which comprises contacting monomeric olefin under polymerisation conditions in the gas phase with the above polymerisation catalyst.

Many of the above parameters are important for controlling the processability of the polymer product, and thus being able to control them by such a straightforward means is a major benefit. For example, for blow moulding applications it is important

20   that the polymer resin exhibits a relatively high melt flow ratio. Melt flow ratios may be increased to a certain degree by various compounding methods, however these methods increase the costs of manufacture, require additional steps and adversely affect certain desired properties of the polymer. WO 97/19963 describes use of a taming or modifying agent when polymerising with a chromium oxide catalyst to increase the

25   melt flow ratio compared to a polymer produced without such an agent. Introduction of such agents, being typically catalyst poisons, can have a detrimental impact on polymerisation operations including activity. EP-0866077-A describes one method of

controlling the polymerisation rate of a chromium catalyst whilst introducing an agent
to modify polymer properties.

The preferred parameter selected to be controlled by variation of temperature may
be measured off-line with manual input to the operating temperature or using an at or
5   in-line measurement device providing, optionally, closed loop control. The parameter
may also be calculated or predicted from other operating conditions using advanced or
intelligent control systems including for example those provided by Pavillion.

A dramatic impact of polymerisation temperature on production of polymer fines
and on the generation of static electricity has also been discovered in the continuous gas
10   phase polymerisation using late transition metal catalysts, such as those of Formula (I),
in a fluidised bed reactor system. The generation of fines, particularly, is significantly
greater than that expected from experience with polymers of similar density and/or
crystallinity produced under similar conditions with other catalysts such as chromium.
It has therefore been found to be critically important under such operating conditions to
15   use temperature, amongst other parameters to optimise the polymer particle size
produced within the fluidised bed reaction system and to minimise the level of polymer
fines accumulated within the reactor and the polymerisation loop. Cyclones are
effective in minimising the impact on the polymerisation loop (e.g. heat exchanger,
compressor, liquid separator, fluidisation grid and pipework) of carry-over of fine
20   particles from the reactor dis-entrainment zone.

Temperature can also have an impact on other polymerisation conditions, such as
catalyst activity in all polymerisation processes such as gas phase, slurry and solution
processes. The temperature at which the highest activity is reached in the slurry process
has been found to be at a different temperature to that experienced in gas phase
25   operation. Indeed the catalyst activity has surprisingly been found to peak at
significantly below the particle sintering temperature constraint in the slurry process.

A preferred reactor temperature control scheme needs therefore, particularly when
using temperature to control MWD (or extrudability), additionally to optimise the
impact of temperature on all key operating parameters (such as activity, catalyst yield,
30   production rate, fines level, static, product properties) through control of a other control
levers that have been found to be effective such as i) monomer concentration and/or
feed rate ii) inert hydrocarbon concentration and/or molecular weight and iii)

4

fluidisation velocity.

In a preferred embodiment temperature is used to control MWD (or a parameter indicative of MWD) whilst the concentration of hydrogen is used to control the MW of the polymer.

5   In the complexes of Formula (I) it is preferred that A^1 to A^3 are each independently CR where each R is as defined above. In alternative preferred embodiments, A^1 and A^3 are both N and A^2 is CR, or one of A^1 to A^3 is N and the others are independently CR.

The group L may be an ether such as tetrahydrofuran or diethylether, and alcohol

10   such as ethanol or butanol, a primary, secondary or tertiary amine, or a phosphine.

Preferred catalysts for use in the present invention comprise a complex having the formula
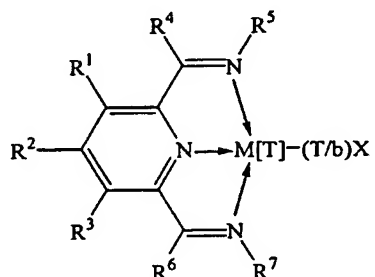
15

Formula (II)

wherein R^1 to R^7 are each independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl, substituted heterohydrocarbyl or SiR'_3 where each R' is independently selected from hydrogen, halogen, hydrocarbyl,

20   substituted hydrocarbyl, heterohydrocarbyl, substituted heterohydrocarbyl.

R^5 and R^7 are preferably independently selected from substituted or unsubstituted alicyclic, heterocyclic or aromatic groups, for example, phenyl, 1-naphthyl, 2-naphthyl, 2-methylphenyl, 2-ethylphenyl, 2,6-diisopropylphenyl, 2,3-diisopropylphenyl, 2,4-diisopropylphenyl, 2,6-di-n-butylphenyl, 2,6-dimethylphenyl, 2,3-dimethylphenyl,

25   2,4-dimethylphenyl, 2-t-butylphenyl, 2,6-diphenylphenyl, 2,4,6-trimethylphenyl, 2,6-trifluoromethylphenyl, 4-bromo-2,6-dimethylphenyl, 3,5 dichloro2,6-diethylphenyl, and 2,6,bis(2,6-dimethylphenyl)phenyl, cyclohexyl and pyridinyl.

In a preferred embodiment R^5 is represented by the group "P" and R^7 is represented by the group "Q" as follows:

5   Group P   Group Q

wherein R^{19} to R^{28} are independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl or substituted heterohydrocarbyl; when any two or more of R^1 to R^4, R^6 and R^{19} to R^{28} are hydrocarbyl, substituted hydrocarbyl,

10   heterohydrocarbyl or substituted heterohydrocarbyl, said two or more can be linked to form one or more cyclic substituents.

The ring systems P and Q are preferably independently 2,6-hydrocarbylphenyl or fused-ring polyaromatic, for example, 1-naphthyl, 2-naphthyl, 1-phenanthrenyl and 8-quinolinyl.

15   Preferably at least one of R^{19}, R^{20}, R^{21} and R^{22} is hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl or substituted heterohydrocarbyl. More preferably at least one of R^{19} and R^{20}, and at least one of R^{21} and R^{22}, is hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl or substituted heterohydrocarbyl. Most preferably R^{19}, R^{20}, R^{21} and R^{22} are all independently selected from hydrocarbyl, substituted

20   hydrocarbyl, heterohydrocarbyl or substituted heterohydrocarbyl. R^{19}, R^{20}, R^{21} and R^{22} are preferably independently selected from methyl, ethyl, n-propyl, iso-propyl, n-butyl, sec-butyl, tert.-butyl, n-pentyl, neopentyl, n-hexyl, 4-methylpentyl, n-octyl, phenyl and benzyl.

R^1, R^2, R^3, R^4, R^6, R^{19}, R^{20}, R^{21}, R^{22}, R^{23}, R^{25}, R^{26} and R^{28} are preferably

25   independently selected from hydrogen and C_1 to C_8 hydrocarbyl, for example, methyl, ethyl, n-propyl, n-butyl, t-butyl, n-hexyl, n-octyl, phenyl and benzyl.

In an alternative embodiment R^5 is a group having the formula -$NR^{29}R^{30}$ and R^7 is a group having the formula -$NR^{31}R^{32}$, wherein R^{29} to R^{32} are independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl or

substituted heterohydrocarbyl; when any two or more of R^1 to R^4, R^6 and R^{29} to R^{32} are hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl or substituted heterohydrocarbyl, said two or more can be linked to form one or more cyclic substituents.

Each of the atoms nitrogen atoms is coordinated to the metal by a "dative" bond, i.e. a bond formed by donation of a lone pair of electrons from the nitrogen atom. The remaining bonds on each of these atoms are covalent bonds formed by electron sharing between the atoms and the organic ligand as shown in the defined formula for the metal complex illustrated above.

The atom or group represented by X in the compounds of Formula (I) and (II) can be, for example, selected from halide, sulphate, nitrate, thiolate, thiocarboxylate, BF_4^-, PF_6^-, hydride, hydrocarbyloxide, carboxylate, hydrocarbyl, substituted hydrocarbyl and heterohydrocarbyl, or β-diketonates. Examples of such atoms or groups are chloride, bromide, methyl , ethyl, propyl, butyl, octyl, decyl, phenyl, benzyl, methoxide, ethoxide, isopropoxide, tosylate, triflate, formate, acetate, phenoxide and benzoate. Preferred examples of the atom or group X in the compounds of Formula (I) are halide, for example, chloride, bromide; hydride; hydrocarbyloxide, for example, methoxide, ethoxide, isopropoxide, phenoxide; carboxylate, for example, formate, acetate, benzoate; hydrocarbyl, for example, methyl, ethyl, propyl, butyl, octyl, decyl, phenyl, benzyl; substituted hydrocarbyl; heterohydrocarbyl; tosylate; and triflate. Preferably X is selected from halide, hydride and hydrocarbyl. Chloride is particularly preferred.

Preferred metals M in the complexes of Formula (I) are Fe and Co.

The catalysts utilised in the present invention can if desired comprise more than one of the above-mentioned late transition metal compounds. The catalysts can also include one or more other types of catalyst, such as those of the type used in conventional Ziegler-Natta catalyst systems, metallocene-based catalysts, monocyclopentadienyl- or constrained geometry based catalysts, or heat activated supported chromium oxide catalysts (e.g. Phillips-type catalyst). In addition to the above complex, preferred catalysts for use in the process of the present invention additionally comprise an activator compound. The activator is suitably selected from organoaluminium compounds and hydrocarbylboron compounds. Suitable organoaluminium compounds include compounds of the formula AlR_3, where each R is

7

independently C_1-C_{12} alkyl or halo. Examples include trimethylaluminium (TMA), triethylaluminium (TEA), tri-isobutylaluminium (TIBA), tri-n-octylaluminium, methylaluminium dichloride, ethylaluminium dichloride, dimethylaluminium chloride, diethylaluminium chloride, ethylaluminiumsesquichloride,

5   methylaluminiumsesquichloride, and alumoxanes. Alumoxanes are well known in the art as typically the oligomeric compounds which can be prepared by the controlled addition of water to an alkylaluminium compound, for example trimethylaluminium. Such compounds can be linear, cyclic or mixtures thereof. Commercially available alumoxanes are generally believed to be mixtures of linear and cyclic compounds. The

10   cyclic alumoxanes can be represented by the formula $[R^{16}AlO]_s$ and the linear alumoxanes by the formula $R^{17}(R^{18}AlO)_s$ wherein s is a number from about 2 to 50, and wherein R^{16}, R^{17}, and R^{18} represent hydrocarbyl groups, preferably C_1 to C_6 alkyl groups, for example methyl, ethyl or butyl groups. Alkylalumoxanes such as methylalumoxane (MAO) are preferred.

15   Mixtures of alkylalumoxanes and trialkylaluminium compounds are particularly preferred, such as MAO with TMA or TIBA. In this context it should be noted that the term "alkylalumoxane" as used in this specification includes alkylalumoxanes available commercially which may contain a proportion, typically about 10wt%, but optionally up to 50wt%, of the corresponding trialkylaluminium; for instance, commercial MAO

20   usually contains approximately 10wt% trimethylaluminium (TMA), whilst commercial MMAO contains both TMA and TIBA. uantities of alkylalumoxane quoted herein include such trialkylaluminium impurities, and accordingly quantities of trialkylaluminium compounds quoted herein are considered to comprise compounds of the formula AlR_3 additional to any AlR_3 compound incorporated within the

25   alkylalumoxane when present.

Examples of suitable hydrocarbylboron compounds are boroxines, trimethylboron, triethylboron, dimethylphenylammoniumtetra(phenyl)borate, trityltetra(phenyl)borate, triphenylboron, dimethylphenylammonium tetra(pentafluorophenyl)borate, sodium tetrakis[(bis-3,5-trifluoromethyl)phenyl]borate,

30    $H^+(OEt_2)$[(bis-3,5-trifluoromethyl)phenyl]borate, trityltetra(pentafluorophenyl)borate and tris(pentafluorophenyl) boron.

In the preparation of the catalysts utilised in the present invention the quantity of

8

activating compound selected from organoaluminium compounds and hydrocarbylboron compounds to be employed is easily determined by simple testing, for example, by the preparation of small test samples which can be used to polymerise small quantities of the monomer(s) and thus to determine the activity of the produced catalyst. It is

5   generally found that the quantity employed is sufficient to provide 0.1 to 20,000 atoms, preferably 1 to 2000 atoms of aluminium or boron per atom of metal M in the compound of Formula (I).

An alternative class of activators comprise salts of a cationic oxidising agent and a non-coordinating compatible anion. Examples of cationic oxidising agents include:

10   ferrocenium, hydrocarbyl-substituted ferrocenium, Ag^+, or Pb^{2+}. Examples of non-coordinating compatible anions are BF_4^-, $SbCl_6^-$, PF_6^-, tetrakis(phenyl)borate and tetrakis(pentafluorophenyl)borate.

The catalyst may also comprise a neutral Lewis base. Neutral Lewis bases are well known in the art of Ziegler-Natta catalyst polymerisation technology. Examples of

15   classes of neutral Lewis bases suitable for the present invention are unsaturated hydrocarbons, for example, alkenes (other than 1-olefins) or alkynes, primary, secondary and tertiary amines, amides, phosphoramides, phosphines, phosphites, ethers, thioethers, nitriles, carbonyl compounds, for example, esters, ketones, aldehydes, carbon monoxide and carbon dioxide, sulphoxides, sulphones and boroxines. Although

20   1-olefins are capable of acting as neutral Lewis bases, for the purposes of the present invention they are regarded as monomer or comonomer 1-olefins and not as neutral Lewis bases *per se*. However, alkenes which are internal olefins, for example, 2-butene and cyclohexene are regarded as neutral Lewis bases in the present invention.

Preferred monomers for homopolymerisation processes are ethylene and

25   propylene. Suitable other monomers for use in copolymerisation with ethylene and/or propylene are, for example, C_{2-20} α-olefins: specifically 1-butene, 1-pentene, 1-hexene, 4-methylpentene-1, 1-heptene, 1-octene, 1-nonene, 1-decene, 1-undecene, 1-dodecene, 1-tridecene, 1-tetradecene, 1-pentadecene, 1-hexadecene, 1-heptadecene, 1-octadecene, 1-nonadecene, and 1-eicosene. Other monomers include methyl methacrylate, methyl

30   acrylate, butyl acrylate, acrylonitrile, vinyl acetate, and styrene.

Irrespective of the polymerisation or copolymerisation technique employed, polymerisation or copolymerisation is typically carried out under conditions that

substantially exclude oxygen, water, and other materials that act as catalyst poisons.
Also, polymerisation or copolymerisation can be carried out in the presence of additives
to control polymer or copolymer molecular weights.

The process of the present invention is preferably gas phase. The gas phase

5   process is conveniently operated at a temperature of between 50 and 120°C, preferably
between 80 and 110°C. We have found that with the catalyst systems employed in the
present invention, increasing the polymerisation temperature causes a significant
decrease in the molecular weight distribution. This is not known with other catalyst
systems, and is particularly surprising.

10   The use of hydrogen gas as a means of controlling the average molecular weight
of the polymer or copolymer applies generally to the polymerisation process utilised in
the present invention. For example, hydrogen can be used to reduce the average
molecular weight of polymers or copolymers prepared using gas phase, slurry phase,
bulk phase or solution phase polymerisation conditions. The quantity of hydrogen gas

15   to be employed to give the desired average molecular weight can be determined by
simple "trial and error" polymerisation tests.

The gas phase polymerisation conditions utilised in the invention are particularly
useful for the production of high or low density grades of polyethylene, and
polypropylene. In these processes the polymerisation conditions can be batch,

20   continuous or semi-continuous. Furthermore, one or more reactors may be used, e.g.
from two to five reactors in series. Different reaction conditions, such as different
temperatures or hydrogen or comonomer concentrations may be employed in the
different reactors. In the gas phase process, the catalyst is generally metered and
transferred into the polymerisation zone in the form of a particulate solid either as a dry

25   powder (e.g. with an inert gas) or as a slurry. This solid can be, for example, a solid
catalyst system formed from the one or more of complexes of the invention and an
activator with or without other types of catalysts, or can be the solid catalyst alone with
or without other types of catalysts. In the latter situation, the activator can be fed to the
polymerisation zone, for example as a solution, separately from or together with the

30   solid catalyst. Preferably the catalyst system or the transition metal complex
component of the catalyst system employed in the gas phase polymerisation is
supported on one or more support materials. Most preferably the catalyst system is

10

supported on the support material prior to its introduction into the polymerisation zone. Suitable support materials are, for example, silica, alumina, zirconia, talc, kieselguhr, or magnesia. Impregnation of the support material can be carried out by conventional techniques, for example, by forming a solution or suspension of the catalyst components

5   in a suitable diluent or solvent, and slurrying the support material therewith. The support material thus impregnated with catalyst can then be separated from the diluent for example, by filtration or evaporation techniques. Once the polymer product is discharged from the reactor, any associated and absorbed hydrocarbons are substantially removed, or degassed, from the polymer by, for example, pressure let-down or gas

10   purging using fresh or recycled steam, nitrogen or light hydrocarbons (such as ethylene). Recovered gaseous or liquid hydrocarbons may be recycled to the polymerisation zone.

       Methods for operating gas phase polymerisation processes are well known in the art. Such methods generally involve agitating (e.g. by stirring, vibrating or fluidising) a

15   bed of catalyst, or a bed of the target polymer (i.e. polymer having the same or similar physical properties to that which it is desired to make in the polymerisation process) containing a catalyst, and feeding thereto a stream of monomer at least partially in the gaseous phase, under conditions such that at least part of the monomer polymerises in contact with the catalyst in the bed. The bed is generally cooled by the addition of cool

20   gas (e.g. recycled gaseous monomer) and/or volatile liquid (e.g. a volatile inert hydrocarbon, or gaseous monomer which has been condensed to form a liquid). The polymer produced in, and isolated from, gas phase processes forms directly a solid in the polymerisation zone and is free from, or substantially free from liquid. As is well known to those skilled in the art, if any liquid is allowed to enter the polymerisation

25   zone of a gas phase polymerisation process the quantity of liquid in the polymerisation zone is small in relation to the quantity of polymer present. This is in contrast to "solution phase" processes wherein the polymer is formed dissolved in a solvent, and "slurry phase" processes wherein the polymer forms as a suspension in a liquid diluent.

       The gas phase process can be operated under batch, semi-batch, or so-called

30   "continuous" conditions. It is preferred to operate under conditions such that monomer is continuously recycled to an agitated polymerisation zone containing polymerisation catalyst, make-up monomer being provided to replace polymerised monomer, and

continuously or intermittently withdrawing produced polymer from the polymerisation zone at a rate comparable to the rate of formation of the polymer, fresh catalyst being added to the polymerisation zone to replace the catalyst withdrawn form the polymerisation zone with the produced polymer.

5   For typical production of impact copolymers, homopolymer formed from the first monomer in a first reactor is reacted with the second monomer in a second reactor. For manufacture of propylene/ethylene impact copolymer in a gas-phase process, propylene is polymerized in a first reactor; reactive polymer transferred to a second reactor in which ethylene or other comonomer is added. The result is an intimate mixture of a

10   isotactic polypropylene chains with chains of a random propylene/ethylene copolymer. A random copolymer typically is produced in a single reactor in which a minor amount of a comonomer (typically ethylene) is added to polymerizing chains of propylene.

       Methods for operating gas phase fluidised bed processes for making polyethylene, ethylene copolymers and polypropylene are well known in the art. The process can be

15   operated, for example, in a vertical cylindrical reactor equipped with a perforated distribution plate to support the bed and to distribute the incoming fluidising gas stream through the bed. The fluidising gas circulating through the bed serves to remove the heat of polymerisation from the bed and to supply monomer for polymerisation in the bed. Thus the fluidising gas generally comprises the monomer(s) normally together

20   with some inert gas (e.g. nitrogen or inert hydrocarbons such as methane, ethane, propane, butane, pentane or hexane) and optionally with hydrogen as molecular weight modifier. The hot fluidising gas emerging from the top of the bed is led optionally through a velocity reduction zone (this can be a cylindrical portion of the reactor having a wider diameter) and, if desired, a cyclone and or filters to disentrain fine solid

25   particles from the gas stream. The hot gas is then led to a heat exchanger to remove at least part of the heat of polymerisation. Catalyst is preferably fed continuously or at regular intervals to the bed. At start up of the process, the bed comprises fluidisable polymer which is preferably similar to the target polymer. Prior to start-up it is preferred to purge the reaction system of catalyst poisons and to further purify the

30   reaction system (fluidised bed reactor and associated loop pipe-work) with a poison scavenger such as an alkyl aluminium, for example TEAL. Additionally it may be advantageous to pre-load the start-up bed with such an aluminium alkyl. Polymer is

produced continuously within the bed by the polymerisation of the monomer(s).
Preferably means are provided to discharge polymer from the bed continuously or at
regular intervals to maintain the fluidised bed at the desired height. The process is
generally operated at temperatures for example, between 50 and 120°C. The

5   temperature of the bed is maintained below the sintering temperature of the fluidised
polymer to avoid problems of agglomeration. Inert solids, as described in EP 266074,
may be added to the fluidised bed to improve fluidisation characteristics, particularly
when producing sticky polymers of very low density or at close to the sintering
temperature.

10   In the gas phase fluidised bed process for polymerisation of olefins the heat
evolved by the exothermic polymerisation reaction is normally removed from the
polymerisation zone (i.e. the fluidised bed) by means of the fluidising gas stream as
described above. The hot reactor gas emerging from the top of the bed is led through
one or more heat exchangers wherein the gas is cooled. The cooled reactor gas,

15   together with any make-up gas, is then recycled to the base of the bed. In the gas phase
fluidised bed polymerisation process of the present invention it is desirable to provide
additional cooling of the bed (and thereby improve the space time yield of the process)
by feeding a volatile liquid to the bed under conditions such that the liquid evaporates in
the bed thereby absorbing additional heat of polymerisation from the bed by the "latent

20   heat of evaporation" effect. When the hot recycle gas from the bed enters the heat
exchanger, the volatile liquid can condense out. In one embodiment of the present
invention the volatile liquid is separated from the recycle gas and reintroduced
separately into the bed. Thus, for example, the volatile liquid can be separated and
sprayed into the bed. In another embodiment of the present invention the volatile liquid

25   is recycled to the bed with the recycle gas. Thus the volatile liquid can be condensed
from the fluidising gas stream emerging from the reactor and can be recycled to the bed
with recycle gas, or can be separated from the recycle gas and then returned to the bed.

The method of condensing liquid in the recycle gas stream and returning the
mixture of gas and entrained liquid to the bed is described in EP-A-0089691 and EP-A-

30   0241947. It is preferred to reintroduce the condensed liquid into the bed separate from
the recycle gas using the process described in our US Patent 5541270, the teaching of
which is hereby incorporated into this specification.

When using the catalysts of the present invention under gas phase polymerisation conditions, the catalyst, or one or more of the components employed to form the catalyst can, for example, be introduced into the polymerisation reaction zone in liquid form, for example, as a solution in an inert liquid diluent. Thus, for example, the

5   transition metal component, or the activator component, or both of these components can be dissolved or slurried in a liquid diluent and fed to the polymerisation zone. Under these circumstances it is preferred the liquid containing the component(s) is sprayed as fine droplets into the polymerisation zone. The droplet diameter is preferably within the range 1 to 1000 microns. EP-A-0593083, the teaching of which is

10   hereby incorporated into this specification, discloses a process for introducing a polymerisation catalyst into a gas phase polymerisation. The methods disclosed in EP-A-0593083 can be suitably employed in the polymerisation process of the present invention if desired.

Although not usually required, upon completion of polymerisation or

15   copolymerisation, or when it is desired to terminate polymerisation or copolymerisation or at least temporarily temper the activity of the catalyst or completely deactivate the catalyst or catalyst component of this invention, the catalyst can be contacted with water, carbon dioxide, carbon monoxide, alcohols, acetone, or other suitable catalyst deactivators in a manner known to persons of skill in the art.

20   The present invention is illustrated in the following Examples.

<u>EXAMPLES</u>

<u>EXAMPLE 1</u>

<u>Catalyst Preparation</u>

The catalyst used was 2,6-diacetylpyridinebis(2,4,6-trimethylanil)FeCl$_2$ activated

25   with methylaluminoxane (MAO) and supported on silica (Crosfield grade ES70X). The preparation of this catalyst is described in detail in WO 99/46304, the content of which is incorporated herein by reference.

<u>EXAMPLE 2</u>

<u>Polymerisation</u>

30   The polymerisations were carried out in a fluidised bed gas phase polymerisation reactor consisting of a plenum, a distribution grid, a vertical cylinder of diameter 0.75m and height 5m and a velocity reduction chamber. The hot reaction gases exiting the

14

fluidised bed reactor pass through the expanded velocity reduction zone and are
recycled to the reactor via a line equipped with a compressor and with a heat transfer
means. The cooled recycle gas enters the reactor plenum in the lower part of the reactor
vessel and into the fluidised bed consisting of a high density polyethylene powder via
5   the distribution grid. Fresh make-up ethylene, pentane, hydrogen and nitrogen, which
represent the main constituents of the gas reaction mixture are introduced into the
recycle line.

The gas reaction mixture, which contains ethylene, pentane, hydrogen and
nitrogen and other minor components passes through the fluidised bed at a pressure of
10   2.4MPa, and with an upward fluidisation velocity of 0.42m/s.

The polyethylene powder produced is continuously withdrawn to maintain a
constant fluidised bed height.

The catalyst used was the catalyst prepared according to Example 1. The catalyst
injection rate was set such as to maintain the production rate constant at the desired
15   level.

The operating conditions in the various runs are shown in Table 1 below.

TABLE 1

Reference		A	B	C	D	E
T polymerisation	°C	106	100	95	90	80
Partial pressure C_2H_4	bar	8	8	8	8	8
pH_2/pC_2		0.06	0.18	0.27	0.32	0.56
Partial pressure pentane	bar	2	2	2	2	2
Bed Level	m	5	5	5	5	5
Fluidisation Velocity	cm/s	40	40	40	40	42
Production rate	kg/h	90	80	80	90	100

pH_2/pC_2 = ratio of partial pressure of H_2 to partial pressure of ethylene

20   The physical properties of the polymers were evaluated, and are shown in Table 2
below.

Melt Mass-Flow Rate (MFR)

Melt Mass-Flow Rate of the materials was measured to ISO 1133:1997 –
condition 7.

15

<u>Annealed density</u>

This was measured to specification ISO 1872-1:1993 using test method ISO 1183:1987.

<u>Plastic Recovery (PR)</u>

5   This was measured as follows. A sample of polymer is extruded through a standard melt flow rate at 190°C in accordance with ISO 1133:1997 - condition 7 and the extrudate left to cool to ambient temperature. The extrudate diameter is measured at two points (within 6mm of the lower end) and the average of these two measurements taken to be the average mean diameter. PR is then calculated as

10   PR% = 100 x $\dfrac{\text{Mean diameter of extrudate - diameter of die orifice}}{\text{Diameter of die orifice}}$

TABLE 2

	A	B	C	D	E
Polymerisation temp. - °C	106	100	95	90	80
Extrudate Density - kg/m^3	962.1	963.2	963.4	963.5	963.5
Annealed Density - kg/m^3	963.7	965.4	965.9	965.9	965.3
MWD M_w/M_n by GPC	6.5	7.5	8.9	9.6	10.8
MFR 2.16kg - g/600s	0.616	0.708	0.621	0.536	0.462
MFR 5.00kg - g/600s	2.32	2.67	2.4	2.23	1.87
MFR 21.6kg - g/600s	30.14	39.7	37.43	39.92	36.5
MFR ratio	49	56	60	74	79
PR 2.16kg - %	28	27	30	29	29
PR 5.00kg - %	38	41	40	43	43
PR 21.6kg - %	80	83	86	93	92

16

EXAMPLE 3

The catalyst used was 2,6-diacetylpyridinebis(2,4,6-trimethylanil)FeCl$_2$ activated with methylaluminoxane (MAO) and supported on silica (Crosfield grade ES70X), pre-calcined for for 6 hours at 200°C under nitrogen. The preparation of the complex is

5   described in detail in WO 99/46304.

Catalysts A and B had the following compositions:

Catalyst A:

Al = 6.05%

Fe = 0.127%

10   MAO:Fe 100:1 molar

Catalyst B:

Al = 5.92%

Fe = 0.125%

MAO:Fe 98:1 molar

15   Two polymerisations were conducted. The reaction conditions and polymer properties are given below in Table 3.

TABLE 3

	Catalyst A	Catalyst B
Temperature - °C	80	90
Ethylene - vol%	8.6	15.0
Hydrogen - vol%	0.6	0.65
Solids content - %	25	24.5
Productivity - g/g	3763	6800
Rate - kg/h	7.5	7.5
Powder melt index	0.52	0.41
Powder GPC: M_n	16100	19700
M_w	174400	151700
MWD - M_n/M_w	10.8	7.7
Pelletised melt index (2.16kg)	0.45	0.38
Pellet annealed density - kg/m^3	963.7	963.9

17

It can be seen that the molecular weight distribution is lower at higher polymerisation temperature, as also shown in Example 2.

5

10

15

20

25

30

Claims

1.   Use of temperature to control the molecular weight distribution M_w/M_n of polymer, produced by a process which comprises contacting monomeric olefin under polymerisation conditions with a polymerisation catalyst comprising a late transition metal complex.

2.   Use according to claim 1, wherein the late transition metal complex does not have Lewis base functionality which is so arranged that it may co-ordinate intramolecularly with the central metal atom.

3.   Use of temperature to control the die-swell, plastic recovery or MFR ratio of polymer, produced by a process which comprises contacting monomeric olefin under polymerisation conditions with a polymerisation catalyst comprising a late transition metal complex.

4.   Use according to any preceding claim wherein the late transition metal complex comprises a complex of the formula
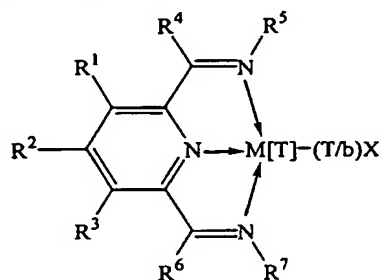

Formula (I)

wherein M is Fe[II], Fe[III], Co[II], Co[III], Ni[II], Rh[II], Rh[III], Ru[II], Ru[III], Ru[IV] or Pd[II]; X represents an atom or group covalently or ionically bonded to the transition metal M; T is the oxidation state of the transition metal M and b is the

valency of the atom or group X; L is a group datively bound to M, and n is from 0 to 5; A^1 to A^3 are each independently N or P or CR, with the proviso that at least one is CR; and R^4 to R^7 are each independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl, substituted heterohydrocarbyl or SiR'_3 where each R' is independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl and substituted heterohydrocarbyl.

5. Use according to claim 4 wherein the late transition metal complex is a complex having the formula

Formula (II)

wherein R^1 to R^7 are each independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl, substituted heterohydrocarbyl or SiR'_3 where each R' is independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl, substituted heterohydrocarbyl.

6. Process according to claim 5 wherein R^5 is represented by the group "P" and R^7 is represented by the group "Q" as follows:


Group P   Group Q

wherein R^{19} to R^{28} are independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl or substituted heterohydrocarbyl; when any two or more of R^1 to R^4, R^6 and R^{19} to R^{28} are hydrocarbyl, substituted hydrocarbyl,

20

heterohydrocarbyl or substituted heterohydrocarbyl, said two or more can be linked to form one or more cyclic substituents.

7.   Use according to any one of claims 4 to 6, wherein R^5 and R^7 are both independently alkyl substituted phenyl.

8.   Use according to any one of claims 4 to 7, wherein the late transition metal complex is 2,6-diacetylpyridinebis(2,4,6-trimethylanil)FeCl$_2$, supported on silica, alumina, zirconia, talc, kieselguhr, or magnesia.

9.   Use according to any preceding claim, wherein the polymerisation catalyst additionally comprises a Ziegler-Natta catalyst, metallocene-based catalyst, monocyclopentadienyl- or constrained geometry based catalyst, or a heat activated supported chromium oxide catalyst.

10.   Use according to any preceding claim, wherein the polymerisation is carried out in the presence of additives to control polymer or copolymer molecular weights.

11.   Use according to any preceding claim, wherein the polymerisation takes place in from two to five reactors in series.

12.   Use according to any preceding claim, in conjunction with the use of hydrogen concentration to control the molecular weight of the polymer.

13.   Use according to any preceding claim wherein the polymerisation conditions are gas phase.

14.   Use according to claim 13, wherein the polymerisation is carried out in a fluidised bed, and additional cooling of the bed is provided by feeding a volatile liquid to the bed under conditions such that the liquid evaporates in the bed.

15.   Use according to claim 13 or 14, wherein the gas phase process is operated at a temperature of between 50 and 120°C, preferably between 80 and 110°C.

16.   Use according to any one of claims 13 to 15, wherein one or more of the components employed to form the catalyst is introduced into the polymerisation reaction zone in liquid form.

17.   Use according to any preceding claim, wherein prior to start-up the reaction system is purified and purged of catalyst poisons with an alkyl aluminium.

Fig.1

MWD by GPC vs T polymerisition
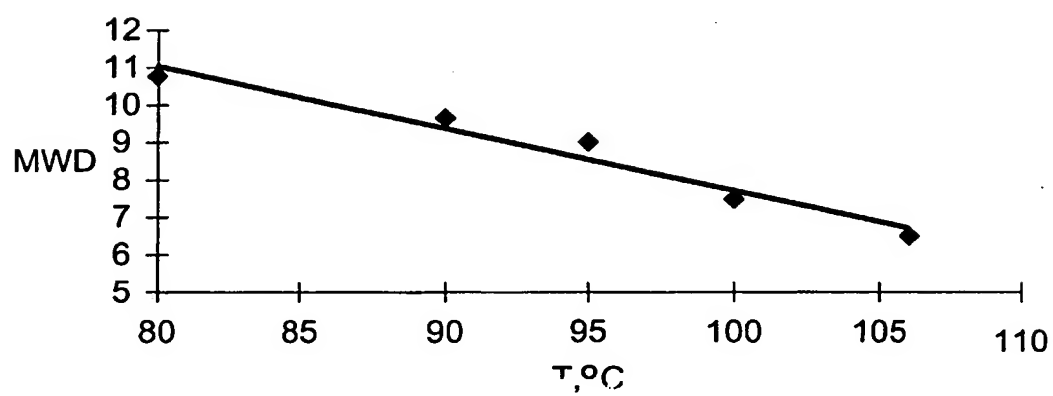
INTERNATIONAL SEARCH REPORT

International application No.
PCT/GB 01/01402

Box I   Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such
an extent that no meaningful International Search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II   Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all
searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment
of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report
covers only those claims for which fees were paid, specifically claims Nos.:

4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is
restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

     1, 2, 4-17 (partially)

Remark on Protest   ☐ The additional search fees were accompanied by the applicant's protest.

☐ No protest accompanied the payment of additional search fees.

Form PCT/ISA/210 (continuation of first sheet (1)) (July 1998)

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7   C08F110/02   C08F2/00   C08F4/70

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7   C08F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category°	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 12981 A (DORER BIRGIT ANGELIKA ;GIBSON VERNON CHARLES (GB); KIMBERLEY BRIAN) 18 March 1999 (1999-03-18) cited in the application page 14, line 18 - line 22 page 16, line 2 - line 4 page 40 -page 43; examples 14,15,22 claims 19,23,26,32 ---	1,2,4-9, 12-17
P,X	EP 1 026 180 A (ELENAC GMBH) 9 August 2000 (2000-08-09) cited in the application page 2, line 50 - line 57 page 3, line 6 - line 10 page 5, line 51 - line 53 claims 1,8	1,2,4-8, 11,13, 14,16
A	page 9; table 1 ---	1

-/--

[X] Further documents are listed in the continuation of box C.   [X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
13 June 2001	0 4. 09. 01

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Gamb, V

Form PCT/ISA/210 (second sheet) (July 1992)

1

International Application No

PCT/GB 01/01402

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 40374 A (EASTMAN CHEM CO) 17 September 1998 (1998-09-17) page 81 -page 82; examples 42,43 ---	1
A	WO 95 33779 A (EXXON CHEMICAL PATENTS INC) 14 December 1995 (1995-12-14) page 30; examples 6,7,12,15; table 1 -----	1

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 9912981	A	18-03-1999	AU	8878398 A	29-03-1999
			BG	104219 A	31-01-2001
			CN	1278272 T	27-12-2000
			EP	1015501 A	05-07-2000
			HU	0004818 A	28-04-2001
			NO	20001116 A	04-05-2000
			PL	339090 A	04-12-2000
			TR	200000599 T	21-12-2000
			AU	2738499 A	27-09-1999
			AU	2738599 A	27-09-1999
			AU	2738699 A	27-09-1999
			AU	2738799 A	27-09-1999
			CN	1299376 T	13-06-2001
			CN	1299377 T	13-06-2001
			EP	1062255 A	27-12-2000
			EP	1062249 A	27-12-2000
			EP	1062250 A	27-12-2000
			EP	1062251 A	27-12-2000
			WO	9946308 A	16-09-1999
			WO	9946302 A	16-09-1999
			WO	9946303 A	16-09-1999
			WO	9946304 A	16-09-1999
EP 1026180	A	09-08-2000	DE	19903695 A	03-08-2000
			JP	2000313713 A	14-11-2000
WO 9840374	A	17-09-1998	EP	0973762 A	26-01-2000
			CN	1258292 T	28-06-2000
			US	6103658 A	15-08-2000
			EP	0975682 A	02-02-2000
			EP	0966490 A	29-12-1999
			WO	9847933 A	29-10-1998
			WO	9840420 A	17-09-1998
			US	6200925 B	13-03-2001
			US	6245871 B	12-06-2001
WO 9533779	A	14-12-1995	AU	698195 B	29-10-1998
			AU	2702695 A	04-01-1996
			BR	9507915 A	12-08-1997
			CA	2187667 A	14-12-1995
			CN	1150436 A	21-05-1997
			DE	69513822 D	13-01-2000
			DE	69513822 T	21-06-2000
			EP	0764175 A	26-03-1997
			ES	2139217 T	01-02-2000
			JP	10501288 T	03-02-1998
			US	5859159 A	12-01-1999

Form PCT/ISA/210 (patent family annex) (July 1992)